



# Mounting instructions MAGURA braze-on parts.

(mainly used on trial bikes)

6 mm vertical travel  
of clamps onto the  
braze-ons

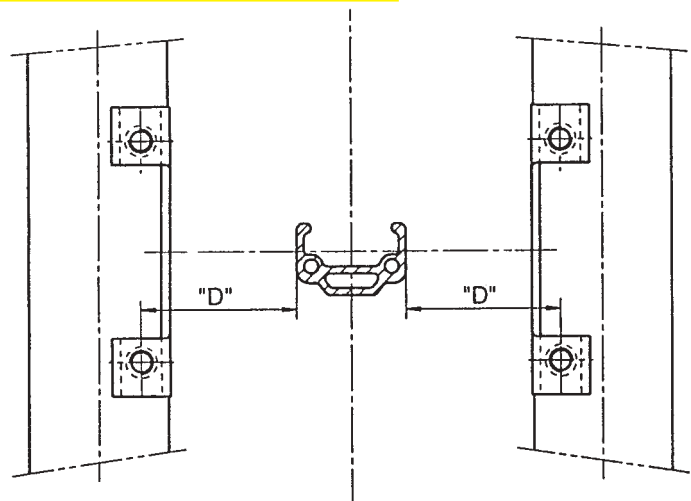

Take care of correct distance "D":  
26,5 – 30 mm including a gap of 2 mm on both sides  
between rim flanc and brake pad

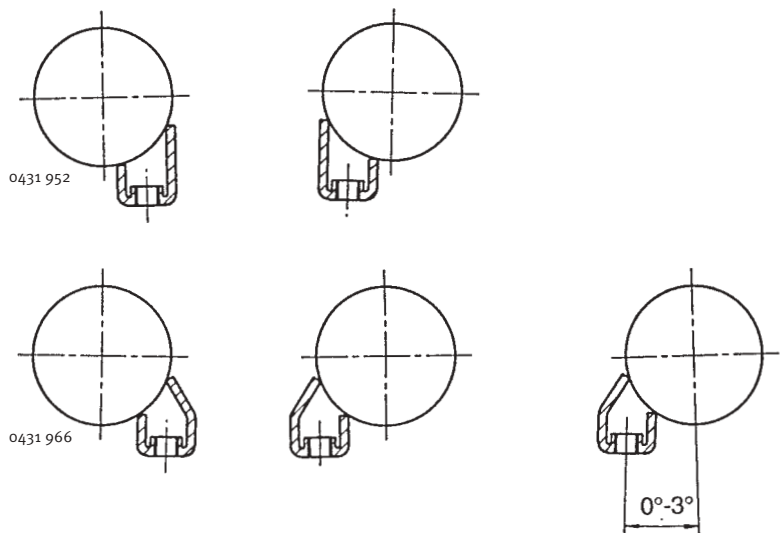

Alternative mounting  
possibilities of the  
braze-ons:



There is neither a quick release option nor a brake  
booster one with the MAGURA braze-ons!